


LED LENS STRIP SERIES

Designed for letters and boxes

KLS-12M24-7W30K-20-24V






SERIES SPECIFICATIONS

LED type	2835
Input	24V DC
Color temperature	3000K/4000K/6500 K
Beam angle	160°
Protection level	IP 20
Working temperature	-25°C + 60°C
Efficacy	140 lm/W
Warranty	5-year parts & 5-year labor



RECOMMENDED LAYOUT



Depth of the sign in mm	Center to Center distance in mm	Power per meter	Brightness of the face
40	90	79	6500 lux
50	100	72	5500 lux
60	120	58	4500 lux
70	140	51	3700 lux
80	160	43	3100 lux
90	180	40	2800 lux
100	200	36	2400 lux
120	200	36	2200 lux

*The result may vary based on face material and application. Please contact our team member to receive best recommendations.

Plunges g. 4, 02300, Vilnius, Lithuania | info@kaisenelectric.com



▼ DOWNLOAD HERE ONLINE ▼

PUSH HERE!


KAISEN
www.kaisenelectric.com

PRODUCT SPECIFICATION

Part number	Optimal depth	Voltage	Wattage per meter	Lumens per meter	Correlated Color Temperature	Packaging
KLS-12M24-7W30K-20-24V	30-120 mm	24V	7.2W	980lm	3000 K	10 m/0,34 kg package 10 ctns/6,59 kg box
KLS-12M24-7W40K-20-24V	30-120 mm	24V	7.2W	980lm	4000 K	10 m/0,34 kg package 10 ctns/6,59 kg box
KLS-12M24-7W65K-20-24V	30-120 mm	24V	7.2W	980lm	6500 K	10 m/0,34 kg package 10 ctns/6,59 kg box


24V

CONNECTION

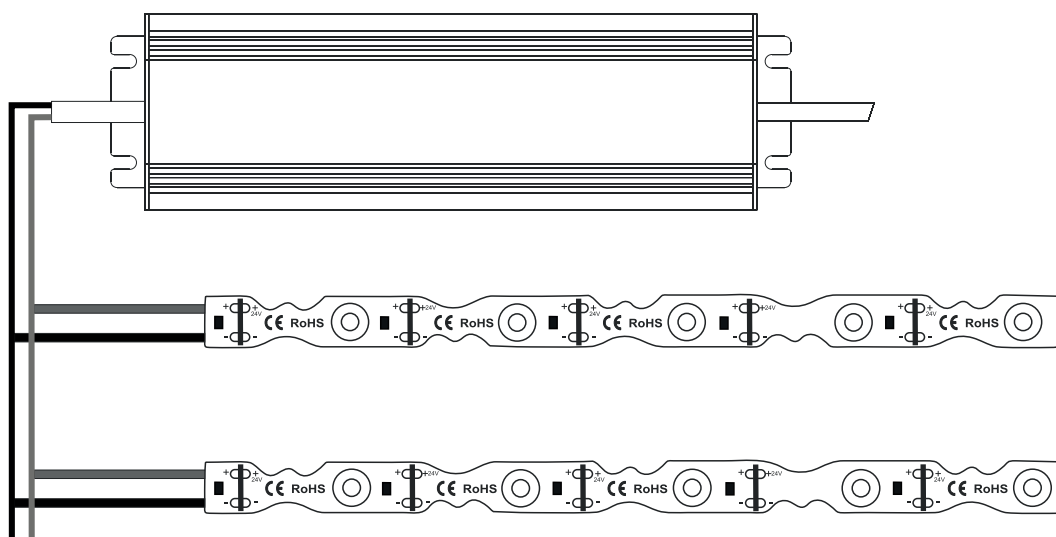

24V

DIMENSIONS

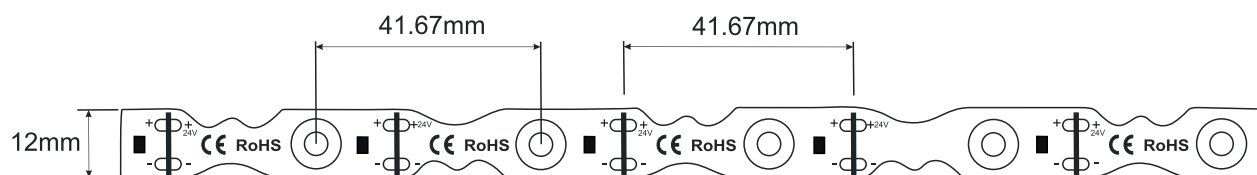

Plunges g. 4, 02300, Vilnius, Lithuania | info@kaisenelectric.com



▼ DOWNLOAD HERE ONLINE ▼

PUSH HERE!

KAISEN

www.kaisenelectric.com