

MICRO SERIES

Designed for acrylic letters

Micro1 HE 0.13W



DESIGNED
FOR
ACRYLIC
LETTERS



5
YEARS
WARRANTY
EXTENDED



0,13 W
LOW POWER FOR
EXTRA BRIGHTNESS



170 lm/W



IP 67






3000K 4000K
6500K

SERIES SPECIFICATIONS

LED type	2835
Input	12V DC
Color temperature	3000K/4000K/6500 K
Beam angle	120°
Protection level	IP 67
Working temperature	-20°C + 60°C
Efficacy	170lm/W
Warranty	5-year parts & 5-year labor



RECOMMENDED LAYOUT

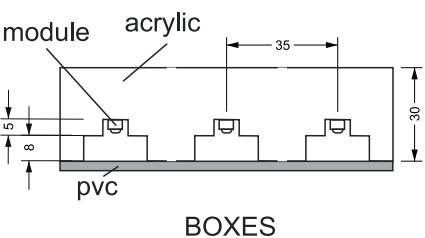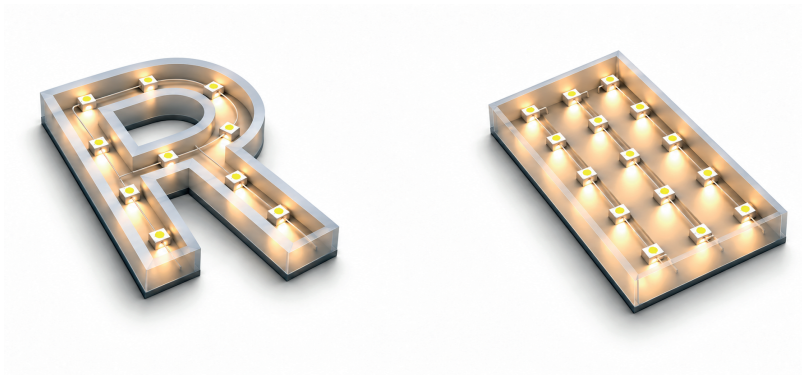

*The result may vary based on face material and application. Please contact our team member to receive best recommendations.

Plunges g. 4, 02300, Vilnius, Lithuania | info@kaisenelectric.com




KAISEN
www.kaisenelectric.com

PRODUCT SPECIFICATION

Part number	Optimal depth	Voltage	Wattage	Lumens per module	Correlated Color Temperature	Packaging
KM-MICRO1-W (0.13W,HE,30K)	30-100 mm	12 V	0.13 W	21lm	3000 K	500 pcs / 0,28 kg package 30000 pcs / 16,8 kg box
KM-MICRO1-W (0.13W,HE,40K)	30-100 mm	12 V	0.13 W	21lm	4000 K	500 pcs / 0,28 kg package 30000 pcs / 16,8 kg box
KM-MICRO1-W (0.13W,HE,65K)	30-100 mm	12 V	0.13 W	21lm	6500 K	500 pcs / 0,28 kg package 30000 pcs / 16,8 kg box

12V

CONNECTION

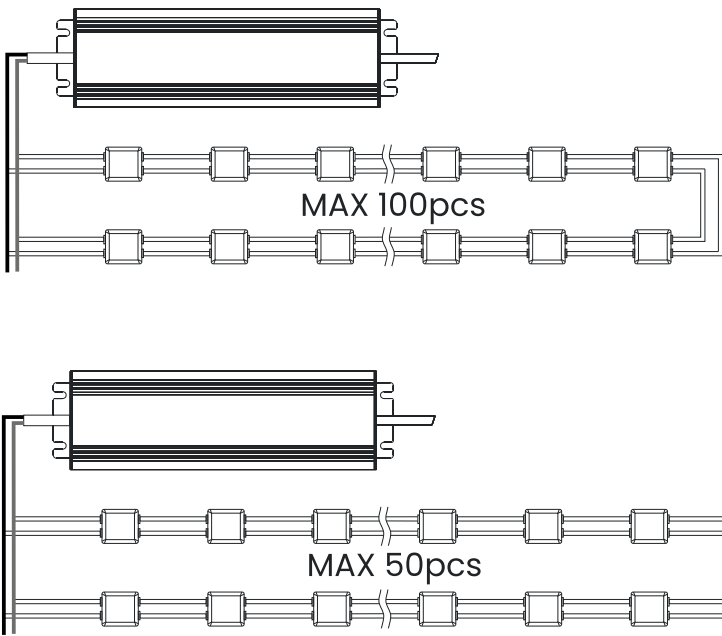

12V

DIMENSIONS

