

## Light-emitting diode module Prism P3 HE 1,5W


### TECHNICAL INFORMATION

LED type	2835
Input	12V DC
Color temperature	3000/4000/6500 K
Beam angle	165°
Protection level	IP 67
Center-to-center distance	240 mm
Working temperature	-30°C + 50°C
Available colors	●
Power	<b>1,5 W</b>
Light output	<b>172 lm</b>




**FOR CHANNEL LETTERS**

MODULE DESIGNED CHANNEL LETTERS




**DEPTH 100-150 MM**

BEST FOR 100-150MM DEEP LIGHTBOXES



**1:1,8 RATIO**

RECOMMENDED DEPTH: C-C DISTANCE RATIO




**UP TO 120LM/W**

HIGH EFFICIENCY LED INSIDE




**IP 67**

DUST AND WATER PROTECTED



**172lm**

HIGH BRIGHTNESS 172 LM PER MODULE




**6500 K**

6500 K AND OTHER COLORS




**5 YEARS WARRANTY**

5 YEAR EXTENDED WARRANTY


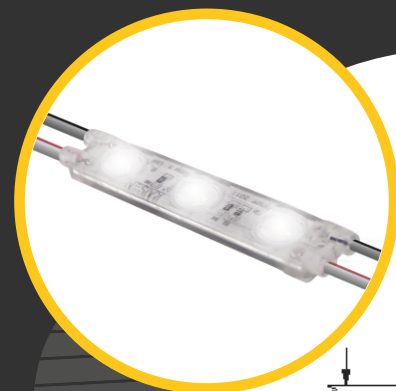


### LIGHT DISTRIBUTION GRAPH


Beam angle is 165°



### DIMENSIONS

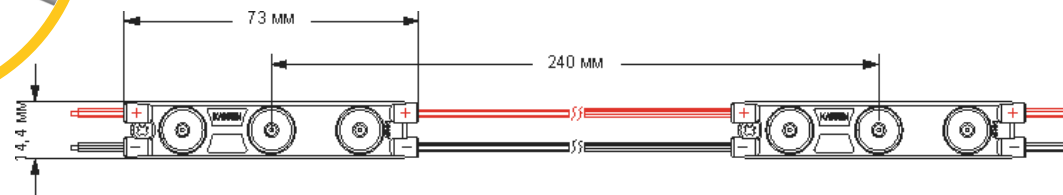

### CONNECTION



### PACKAGING

Packing type	Chain	Package	Box
Quantity	20 pcs	200 pcs	1600 pcs
Weight	0,24 kg	2,4 kg	19,2 kg