

LED LENS BAR SERIES

Designed for one sided Light Boxes


KB-M15-12D-4.32W




FOR
LIGHT
BOXES



5
YEARS
WARRANTY
EXTENDED



MAX 1:3
RATIO



95 lm/W



IP 20




3000K 4000K
6500K

SERIES SPECIFICATIONS

LED type	2835
Input	24V DC
Color temperature	3000K/4000K/6500 K
Beam angle	8x15°
Protection level	IP 20
Working temperature	-20°C + 60°C
Efficacy	95lm/W
Warranty	5-year parts & 5-year labor



RECOMMENDED LAYOUT

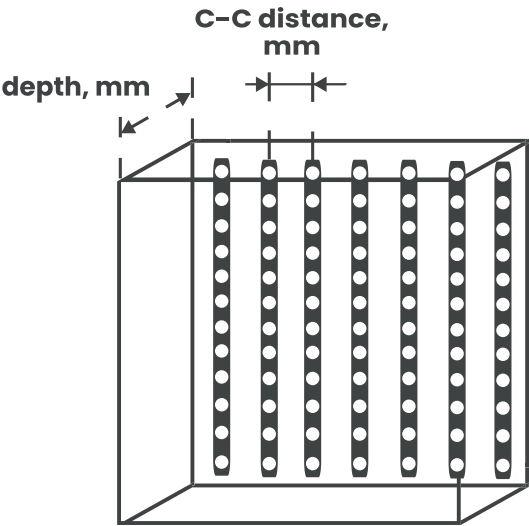

Depth of the sign in mm	Center to Center distance in mm	Power per meter	Brightness of the face
30	80	52	4400lux
40	100	43	3500lux
50	150	29	2400lux
60	150	29	2200lux
70	150	29	2000lux
80	150	29	1900lux
90	150	29	1800lux
100	150	29	1700lux

*The result may vary based on face material and application. Please contact our team member to receive best recommendations.

Plunges g. 4, 02300, Vilnius, Lithuania | info@kaisenelectric.com



▼ DOWNLOAD HERE ONLINE ▼


PUSH HERE!

KAISEN
www.kaisenelectric.com

PRODUCT SPECIFICATION

Part number	Optimal depth	Voltage	Wattage	Lumens per module	Correlated Color Temperature	Packaging
KB-M15-120D-4.32W-30K	30-100 mm	24V	4.32 W	475 lm	3000 K	400 pcs / 27 kg box
KB-M15-120D-4.32W-40K	30-100 mm	24V	4.32 W	475 lm	4000 K	400 pcs / 27 kg box
KB-M15-120D-4.32W-65K	30-100 mm	24V	4.32 W	475 lm	6500 K	400 pcs / 27 kg box


CONNECTION

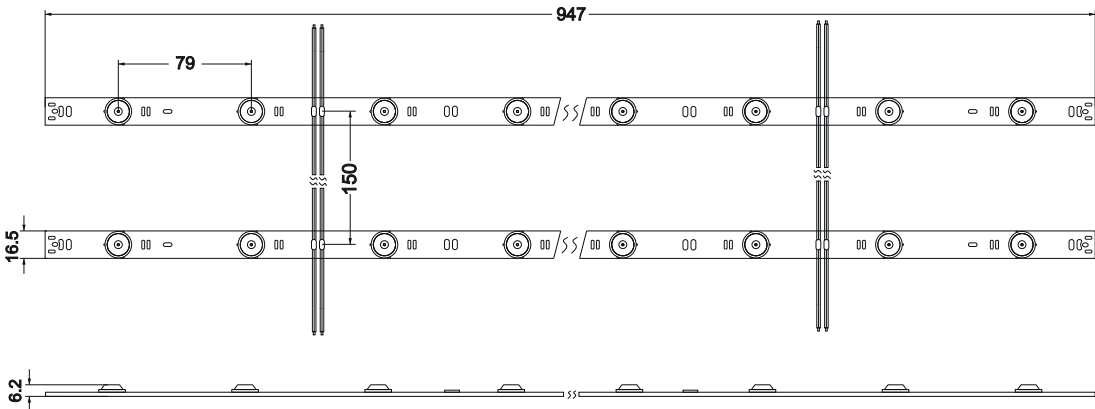

20pcs/chain

24V

DIMENSIONS

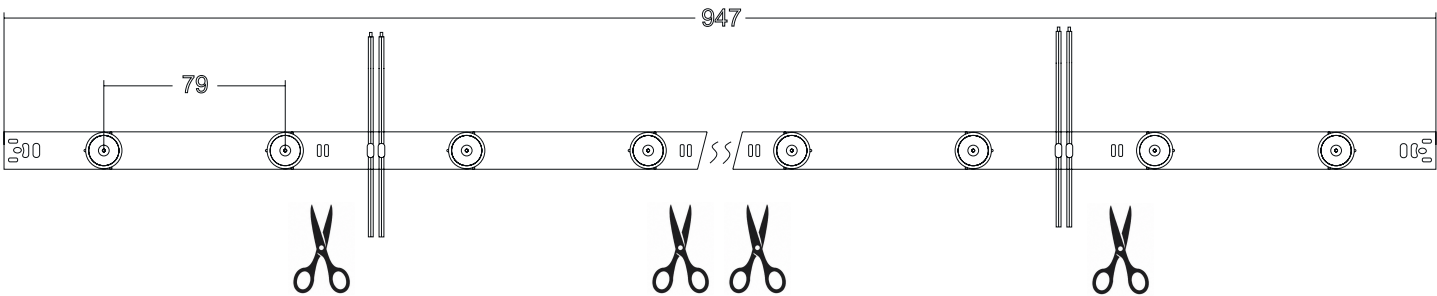

cut every 2 lens