


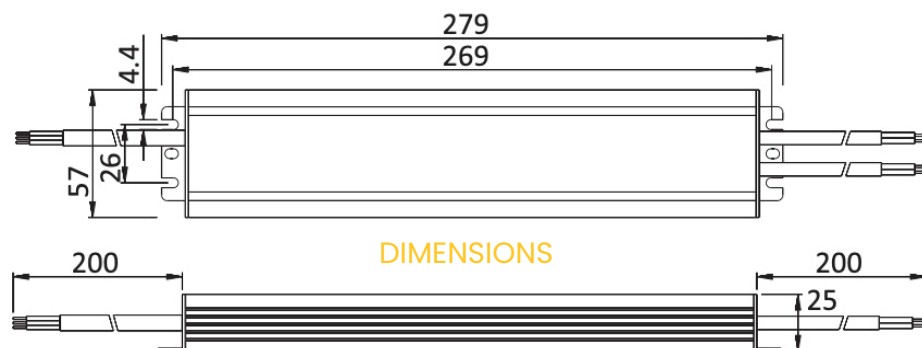


# OUTDOOR METAL POWER SUPPLIES

## KPS-V12-150W67-5Y-SM

 <p><b>IP 67</b> DUST AND WATER PROTECTED</p>	 <p>OVERHEAT PROTECTION</p>	 <p>5 YEARS WARRANTY 5 YEAR EXTENDED WARRANTY</p>	 <p>OVER VOLTAGE PROTECTION</p>	 <p>SHORT CIRCUIT PROTECTION</p>	 <p><b>50 000 h</b> LIFETIME 50 000 H</p>	 <p><b>&lt;0,3 %</b> MINIMIZED DEFECTIVE RATE</p>
------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------



### TECHNICAL INFORMATION

Output Voltage	<b>12V</b>	<b>24V</b>
Rated Current	12,5 A	6,25 A
Rated Power	150 W	150 W
Ripple & Noise (max.)	<100mVp-p	<100mVp-p
Setup, Rise Time	1500ms/230 VAC	1500ms/230 VAC

### STORAGE AND OPERATING CONDITIONS

Working Temp.	<b>-30°C ~ 50°C</b>
Working Humidity	<b>20°C ~ 95%RH</b>
Storage Temp.	<b>-40°C ~ 80°C</b>
Storage Humidity	<b>10°C ~ 95%RH</b>

### PACKAGING

Product Dimension	279x57x25 mm
Products Net Weight	680 g
PCS/Carton (QTY)	25 PCS
Master Carton Size	415x330x180 mm
G. Weight/Carton	18 kg

Input Voltage	Input Frequency	Efficiency (Typ.)	Input Current
<b>170 - 250 V</b>	<b>50/60 Hz</b>	<b>87%</b>	<b>230 V : 1,45 A max.</b>