

OUTDOOR METAL POWER SUPPLIES

KPS-V12-100W67-5Y-RM



IP 67

DUST AND WATER PROTECTED



OVERHEAT PROTECTION



5 YEAR EXTENDED WARRANTY



OVER VOLTAGE PROTECTION



SHORT CIRCUIT PROTECTION




50 000 h

LIFETIME 50 000H



MINIMIZED DEFECTIVE RATE

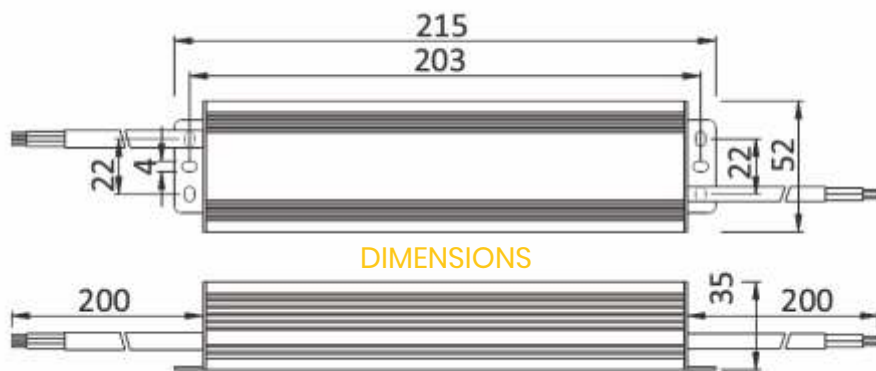

TECHNICAL INFORMATION

Output Voltage	12V	24V
Rated Current	8,33 A	4,17 A
Rated Power	100 W	100 W
Ripple & Noise (max.)	< 100 mVp-p	< 100 mVp-p
Setup, Rise Time	1500 ms/230 VAC	1500 ms/230 VAC

STORAGE AND OPERATING CONDITIONS

Working Temp.	-30°C~50°C
Working Humidity	20°C~95%RH
Storage Temp.	-40°C~80°C
Storage Humidity	10°C~95%RH

PACKAGING

Product Dimension	215x52x35 mm
Products Net Weight	665 g
PCS/Carton (QTY)	20 PCS
Master Carton Size	430x230x180 mm
G. Weight/Carton	13,3 kg

Input Voltage	Input Frequency	Efficiency (Typ.)	Input Current
170 - 250 V	50/60Hz	86%	230V:0,72A max.