


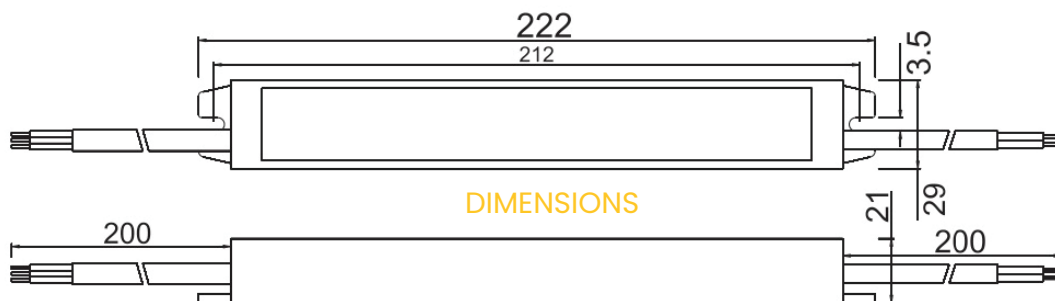


OUTDOOR METAL POWER SUPPLIES

KPS-V12-40W67-5Y-RM

 <p>IP 67 DUST AND WATER PROTECTED</p>	 <p>OVERHEAT PROTECTION</p>	 <p>5 YEAR EXTENDED WARRANTY</p>	 <p>OVER VOLTAGE PROTECTION</p>	 <p>SHORT CIRCUIT PROTECTION</p>	 <p>50 000 h LIFETIME 50 000 H</p>	 <p><0,3 % MINIMIZED DEFECTIVE RATE</p>
--	--	---	--	---	--	--



TECHNICAL INFORMATION

Output Voltage	12V	24V
Rated Current	3,33 A	1,67 A
Rated Power	40 W	40 W
Ripple & Noise (max.)	< 200 mVp-p	< 200 mVp-p
Setup, Rise Time	1500 ms/230 VAC	1500 ms/230 VAC

STORAGE AND OPERATING CONDITIONS

Working Temp.	-30°C ~ 50°C
Working Humidity	20°C ~ 95%RH
Storage Temp.	-40°C ~ 80°C
Storage Humidity	15°C ~ 95%RH

PACKAGING

Product Dimension	222x29x21 mm
Products Net Weight	250 g
PCS/Carton (QTY)	50 PCS
Master Carton Size	400x240x230 mm
G. Weight/Carton	14 kg

Input Voltage	Input Frequency	Efficiency (Typ.)	Input Current
170 - 250 V	50/60 Hz	84 %	230 V: 0,33 A max.