






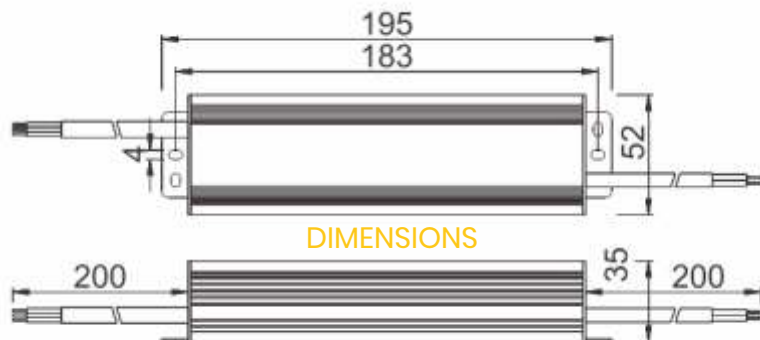


OUTDOOR METAL POWER SUPPLIES

KPS-V12-60W67-5Y-RM

 <p>IP 67 DUST AND WATER PROTECTED</p>	 <p>OVERHEAT PROTECTION</p>	 <p>5 YEAR EXTENDED WARRANTY</p>	 <p>OVER VOLTAGE PROTECTION</p>	 <p>SHORT CIRCUIT PROTECTION</p>	 <p>50 000 h LIFETIME 50 000H</p>	 <p><0,3 % MINIMIZED DEFECTIVE RATE</p>
--	--	---	--	---	---	--



TECHNICAL INFORMATION

Output Voltage	12V	24V
Rated Current	5 A	2,5 A
Rated Power	60 W	60 W
Ripple & Noise (max.)	< 200 mVp-p	< 200 mVp-p
Setup, Rise Time	1500 ms/230 VAC	1500 ms/230 VAC

STORAGE AND OPERATING CONDITIONS

Working Temp.	-30°C~50°C
Working Humidity	20°C~95%RH
Storage Temp.	-40°C~80°C
Storage Humidity	10°C~95%RH

PACKAGING

Product Dimension	195x52x35 mm
Products Net Weight	598 g
PCS/Carton (QTY)	20 PCS
Master Carton Size	350x230x180 mm
G. Weight/Carton	11,95 kg

Input Voltage	Input Frequency	Efficiency (Typ.)	Input Current
100 - 250 V	50/60Hz	84%	230V:0,48A max.