

OUTDOOR PLASTIC POWER SUPPLIES

KPS-V12-15W67-5Y-RP



IP 67

DUST AND WATER PROTECTED



OVERHEAT PROTECTION



5 YEAR EXTENDED WARRANTY



OVER VOLTAGE PROTECTION




SHORT CIRCUIT PROTECTION



50 000 h

LIFETIME 50 000H

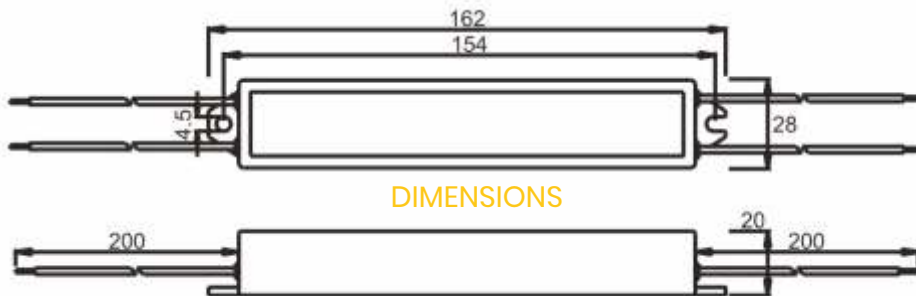

TECHNICAL INFORMATION

Output Voltage	12V	12V
Rated Current	1.25 A	1A
Rated Power	15 W	12 W
Ripple & Noise (max.)	<100 mVp-p	<100 mVp-p
Setup, Rise Time	1500 ms/230 VAC	1500 ms/230 VAC

STORAGE AND OPERATING CONDITIONS

Working Temp.	-30°C~50°C
Working Humidity	20°C~95%RH
Storage Temp.	-40°C~80°C
Storage Humidity	10°C~95%RH

PACKAGING

Product Dimension	162x28x20 mm
Products Net Weight	135 g
PCS/Carton (QTY)	100 PCS
Master Carton Size	260x220x230 mm
G. Weight/Carton	13,53 kg

Input Voltage	Input Frequency	Efficiency (Typ.)	Input Current
100 ~ 250 V	50/60Hz	>80%	230V:0,13 A max.