

# OUTDOOR PLASTIC POWER SUPPLIES

## KPS-V12-60W67-5Y-RP

**IP 67**  
DUST AND WATER PROTECTED


OVERHEAT PROTECTION

5 YEAR EXTENDED WARRANTY

OVER VOLTAGE PROTECTION

SHORT CIRCUIT PROTECTION

**50 000 h**  
LIFETIME 50 000H

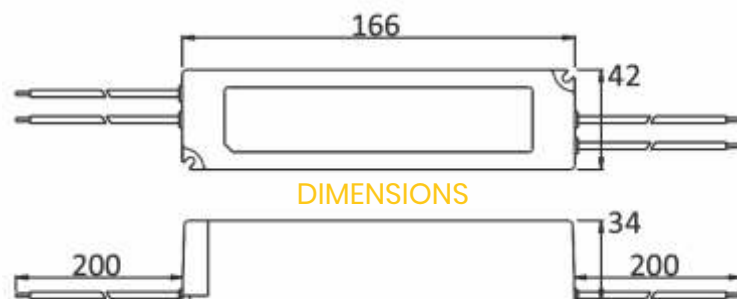

### TECHNICAL INFORMATION

Output Voltage	<b>12V</b>	<b>24V</b>
Rated Current	5 A	2,5 A
Rated Power	60 W	60 W
Ripple & Noise (max.)	< 100 mVp-p	< 100 mVp-p
Setup, Rise Time	1500 ms/230 VAC	1500 ms/230 VAC

### STORAGE AND OPERATING CONDITIONS

Working Temp.	<b>-25°C~50°C</b>
Working Humidity	<b>20°C~98%RH</b>
Storage Temp.	<b>-40°C~80°C</b>
Storage Humidity	<b>10°C~98%RH</b>

### PACKAGING

Product Dimension	166x42x34 mm
Products Net Weight	400 g
PCS/Carton (QTY)	40 PCS
Master Carton Size	400x270x190 mm
G. Weight/Carton	16 kg

Input Voltage	Input Frequency	Efficiency (Typ.)	Input Current
<b>100 ~ 250 V</b>	<b>50/60Hz</b>	<b>85%</b>	<b>230V:0,52A max.</b>